



CALI VINYL[®] PRO

WITH MUTE STEP[®]

A product line by Cali Bamboo

Distributed by Bamboo-Design.ca

1-844-293-6060




Coastal Eucalyptus

Quieter, cushioned comfort.

Cali Vinyl[®] Pro with Mute Step[®] delivers authentic hardwood beauty with attached acoustic padding lining each plank. This IXPE cushion improves sound insulation and provides for quieter steps and more comfortable rooms. Sixteen coastal-inspired colors showcase intricate wood imagery and specialized embossing that matches up with the knots and grains you see. Planks are 100% waterproof and geared for commercial grade durability with a GeoCore[®] limestone composite foundation. A UV ceramic enhanced coating shields a 20mil wear layer, for scratch protection from all the pets, kids, and party-people in your life.

Available Colors

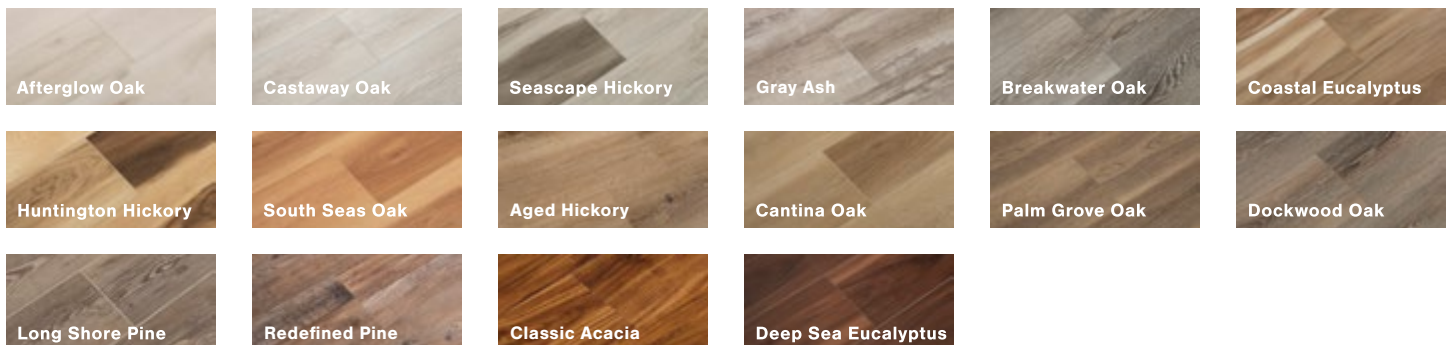



Waterproof
Flooring



Easy to
Clean



HiFi
Imaging



Safe for
the Home



Mute Step
Insulation



Cantina Oak

A World of Good at Your Feet

FloorScore® certified and backed by a 50-year residential warranty, Cali Vinyl is made without toxic chemicals, making it safe for homes, hospitals, children, and pets.





Made for the Soak Zone

100% waterproof planks are exactly that, meaning Cali Vinyl can be installed in every room including kitchens, bathrooms, and basements. This also makes for easy cleaning!

GeoCore: Bad to the Bone

This backbone of limestone composite resists indentation and delivers 50% better dimensional stability (less expansion and contraction), requiring no acclimation or transition pieces.

Accessories



Construction	100% Waterproof GeoCore® (SPC Composite) with attached IXPE Underlayment
Milling	Click-Lock
Grain	HiFi Imaging with realistic wood grain
Plank Length	48"
Plank Width	7-1/4"
Plank Thickness	6.5mm
Attached Pad	1.5mm IXPE
Wear Layer	20 mil. / 0.5mm
Sqft./Box	24.03 sqft.
Install Type	Float, Glue
Residential Warranty	50 Year
Commercial Warranty	15 Year
LEED Points	EQC4.3
Indoor Air Quality	Low Emitting VOC & Prop 65 Compliant (VOC and Phthalate Test Results Available Upon Request)
Certification	FloorScore® Certified
Sound Ratings	With Cali Complete: STC 61 & IIC 63 Without Underlayment: STC 61 & IIC 64
Application	Residential, Commercial
Radiant Heat Compatible	Yes (up to 85°F)
Static Coefficient of Friction (ASTM C1028)	Tests Pending
Cleanability/Stain Resistance	Tests Pending
Light Resistance	Tests Pending
Fire Rating	Tests Pending